

EASY INSTALL®/EASY DESIGN™ SPEAKERS

Surface-Mount Ceiling Speakers SM1EZ, SM4T

Easy Install Speakers drastically cut system installation time because each speaker can be completely installed — mounted in the ceiling, secured, and connected — in less than a minute! This versatile speaker carries voice messages with clarity anywhere dependable communication is required. It can be installed in any suspended ceiling with ceiling tiles... quick, easy, and trouble-free. Compatible with both 70V and 25V systems.



Product Features:

- **Installs in Seconds.** Each speaker assembly is specially designed for immediate installation as soon as you take it out of the box... complete installation takes less than a minute.
- **No-Tool Installation.** No tools needed; everything you need is right in the box.
- **Contemporary, Low-Profile Design.** Looks good in any environment.
- **No Clean-Up.** Installation means piercing ceiling tiles, *NOT* cutting them. So, there's virtually no mess and no ceiling tile pieces to clean up.

Model Variations:

- **SM1EZ** is a one-watt, single tap speaker.
- **SM4T** is a four-watt, multi-tap speaker with settings of 4, 2, 1, 1/2, and 1/4 watts. Settings are rotary switch selectable (there are no transformer wires to deal with).

Technical Specifications:

Dimensions:	9-1/2" diameter
Depth:	3" (from tile surface)
Frequency Response:	125 Hz – 15 kHz
Sensitivity:	90 dBspl (1 watt @ 1 meter)
Product Weight:	2 lb. each
Shipping Weight:	15 lb./carton (5/carton)

Complies with NFPA National code 160b that allows speakers to be installed in plenums and other air handling spaces. Complies with UL-2043.

For System Design for SM1EZ, see pages 17-21; for SM4T, see pages 64-67.

INSTALLS IN SECONDS!




The speaker's two specially designed mounting studs easily pierce through the ceiling tile.



Wide-based wing nuts secure the speaker assembly to the ceiling tile.



Two standard wire nuts connect the speaker wires to the mounting studs, making the electrical connection. That's all it takes!

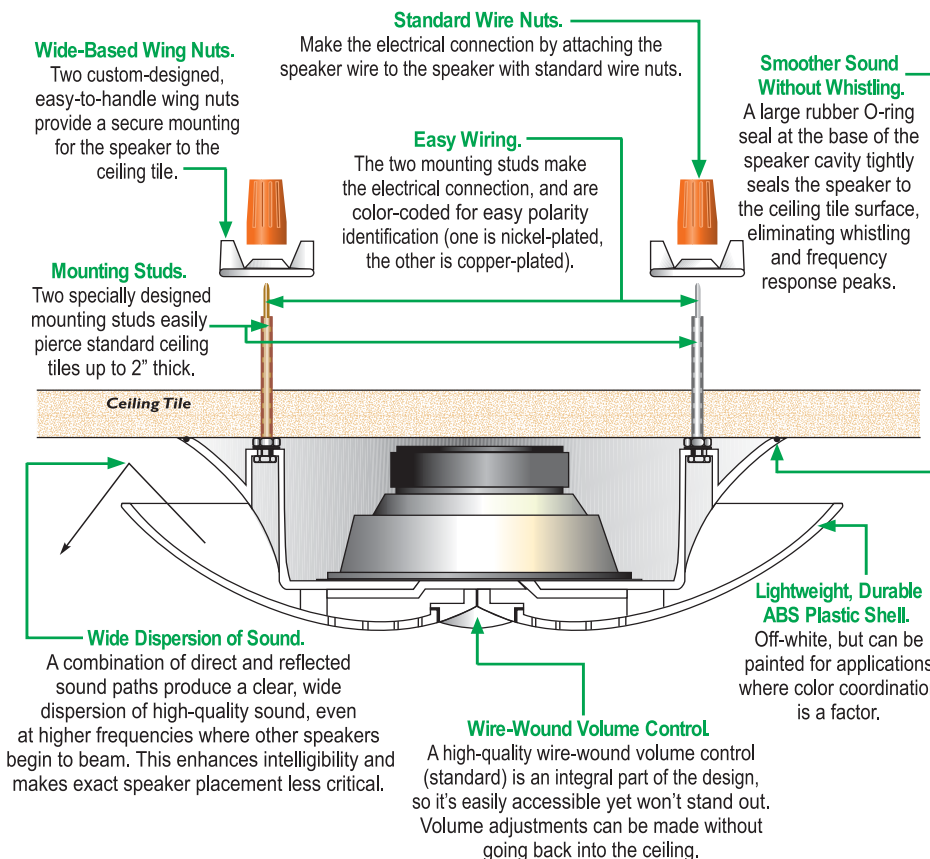

Accessories



SMTB
Tile Bridge

EASY DESIGN™ SPEAKERS



See pages 17-21 for Easy Design.

Dimensions	Shipping Weight (6/carton)
13" dia. x 3-1/4" D	30 lb. / carton

Ceiling Speaker CS1EZ

Bogen's **CS1EZ** is a pre-assembled ceiling speaker comprised of an 8" cone speaker and steel ceiling grille painted with enamel. The CS1EZ includes a volume control knob and rear-mounted screw terminal board for easier electrical connection.

Product Features:

- 1-watt, single-tap design
- Screw terminal connections for fast installation
- Designed for 70V amplifier output
- 8" cone speaker for excellent audio quality
- Heavy-duty, wire-wound volume control with knob
- 50 Hz-12 kHz frequency response
- 95 dBspl @ 4 ft. / 1W input sensitivity
- Off-white finish

Horn Loudspeakers HS7EZ, HS15EZ, HS30EZ

Bogen's line of **Easy Design Horn Loudspeakers** are made of weatherproof all-metal construction, thereby making them ideal for both indoor and outdoor use in industrial plants, warehouses, schools, construction sites, and recreational areas. All models come with swivel and tilt mounting bases for greater flexibility in setting the angle of projection.



Product Features:


- 7.5-, 15-, and 30-watt models
- Single-tap design
- HS7EZ features 12" lead wire for electrical connections
- HS15EZ and HS30EZ feature screw terminal connections for fast installation
- Designed for 70V amplifier outputs
- Weatherproof design
- Stepped attenuator volume control
- Tilt and swivel mounting base for flexibility in coverage
- Textured mocha enamel

See pages 17-21 for Easy Design.

Model	Frequency Response	Sensitivity	Dispersion	Dimensions	Product Weight
HS7EZ	250 Hz - 14 kHz	105 dBspl (4 ft./7.5W) input (@1 kHz)	120°	6" dia. x 4" D	2 lb.
HS15EZ	275 Hz - 14 kHz	121 dBspl (4 ft./15W) input (@1 kHz)	110°	9" dia. x 9-1/4" D	4 lb.
HS30EZ	225 Hz - 14 kHz	125 dBspl (4 ft./30W) input (@1 kHz)	100°	11" dia. x 10-1/2" D	6 lb.

Wall Baffle Speaker WB1EZ

The **WB1EZ** comes pre-assembled with an 8" cone speaker enclosed in a simulated walnut-finished wooden enclosure with a black grille cloth on front and a recessed volume control.



Product Features:

- 1-watt, single-tap design
- Screw terminal connections for fast installation
- Designed for 70V amplifier output
- 8" cone speaker for excellent audio quality
- Recessed volume control
- Designed for easy wall-mount installation; face has 13.5 degree downward angle
- 50 Hz-12 kHz frequency response
- 95 dBspl @ 4ft./1W input sensitivity




See pages 17-21 for Easy Design.

Dimensions	Shipping Weight (4/carton)
9-1/2" W x 9-1/2" H x 5-1/4" D (3-1/4" D @ bottom)	23 lb. / carton

Accessories



BC1
Beam Clamp
(for HS-EZs)



TB8
Tile Bridge
(for CS1EZ)




RE84
Ceiling Enclosure
(for CS1EZ)



MR8
Mounting Ring
(for CS1EZ)



TCSPT1
Terminal Cover for Conduit
(for HS15EZ and HS30EZ)



HSES10
Horn Speaker Electrical Box Strap
(Pack of 10)
(for HS15EZ and HS30EZ)

EASY DESIGN™ GUIDE

What is Easy Design?

1
Select the correct type of speaker for the job
(see chart below)

2
Find the number of speakers needed
(see charts on pages 18-20)

3
Select the amplifier for the system
(see page 21)

Armed with just 3 pieces of information, you can quickly create a bill of material for speaker paging jobs. Bogen's Easy Design line of products was created specifically to make the design process easier and less time consuming for the installer.

You supply some basic pieces of information – type of application, dimensions of the area to be covered, ambient noise level, and ceiling height*. Then, a few simple and direct charts will immediately provide you with the best type of speaker to use, the number of speakers needed, and the amplifier power required for the job.

Each speaker in the Easy Design line is designed with a single power tap and a volume control. Any paging system you create using the Easy Design products will be flexible, robust, and powerful. If noise levels increase in the future, just turn up the volume controls on the speakers – the amplifier will not overload!

You get all the benefits of a 70V central-amplified system – full power capability, high-quality sound and performance, 2-wire installation, long speaker runs, flexibility in amplifier location, no distributed power supplies – and now, super simple system design (we've eliminated the multiple power taps). Easy Design speakers have the high quality and reliability you expect from Bogen.

* Not all dimensions needed for all speaker types. Refer to section 2 for specific dimensions needed for each speaker.

1 Select Speaker Type

- Determine the **ambient noise level and type of environment** in which the speakers will be installed.
- Then select the **speaker(s) best suited** for the area.

Example:

- The ambient noise level in a machine shop in an industrial area is 90 dB. By referring to the chart, you will find that the HS30EZ horn loudspeaker is best suited for this environment.

For applications with mixed noise levels, such as a location with quiet waiting rooms, medium noise level office areas, and very noisy manufacturing, select an appropriate speaker type for each different area.

Once you have selected the speaker type(s), the next step is to determine how many speakers you will need to cover the area sufficiently.

SPEAKER MODELS		SM1EZ WB1EZ CS1EZ <small>see chart on pages 18 & 20</small>	HS7EZ <small>see chart on page 19</small>	HS15EZ HS30EZ <small>see chart on page 19</small>
TYPICAL AMBIENT NOISE LEVEL	TYPICAL ENVIRONMENTS			
VERY HIGH NOISE 85-95 dB <small>Speech Almost Impossible To Hear</small>	<ul style="list-style-type: none"> • Construction Site • Loud Machine Shop • Noisy Manufacturing • Printing Shop 			
HIGH NOISE 75-85 dB <small>Speech Is Difficult To Hear</small>	<ul style="list-style-type: none"> • Assembly Line • Crowded Transit Waiting Area • Machine/Print Shop • Shipping Warehouse • Supermarket (Peak) • Very Noisy Bar or Restaurant 			
MEDIUM NOISE 65-75 dB <small>Must Raise Voice To Be Heard</small>	<ul style="list-style-type: none"> • Bank/Public Area • Transit Waiting Area • Department Store • Noisy Office Setting • Supermarket (Normal) • Bar or Restaurant 			
LOW NOISE 55-65 dB <small>Speech Is Easy To Hear</small>	<ul style="list-style-type: none"> • Conversational Speech • Doctor's Office • Hospital • Hotel Lobby • Quiet Office • Quiet Bar or Restaurant 			

*For applications over 100 dB, contact Bogen for assistance.

2 Determine the Number of Speakers Needed



CS1EZ



SM1EZ

CS1EZ Ceiling Speaker SM1EZ Surface-Mount Ceiling Speaker

Use this chart to determine the number of **CS1EZ Ceiling Speakers** and/or **SM1EZ Surface-Mount Ceiling Speakers** a particular installation will require, based on the dimensions of the area and the ceiling height.

RED for 8' Ceiling
BLUE for 10' Ceiling
GREEN for 12' Ceiling

		Look Up LONGER Dimension Of Area On This Side																		
		20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200
20	20	1	2	3	4	5	6	6	7	8	9	10	10	11	12	13	13	14	15	16
	30	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
30	20	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7
	30	2	3	4	5	5	6	7	8	8	9	10	11	11	12	13	14	14	15	15
40	20	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11
	30	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
40	40	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	50	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
50	20	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	30	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
50	40	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
	50	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
60	20	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
	30	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
60	40	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
	50	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
70	20	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
	30	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
70	40	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	50	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
80	20	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	30	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
80	40	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
	50	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
90	20	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
	30	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
90	40	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
	50	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
100	20	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
	30	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
100	40	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
	50	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
110	20	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
	30	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
110	40	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
	50	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
120	20	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
	30	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
120	40	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
	50	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
130	20	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
	30	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
130	40	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
	50	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
140	20	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
	30	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
140	40	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	50	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
150	20	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	30	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
150	40	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
	50	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
160	20	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
	30	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
160	40	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
	50	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
170	20	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33
	30	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
170	40	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
	50	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
180	20	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
	30	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
180	40	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
	50	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
190	20	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
	30	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
190	40	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
	50	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
200	20	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
	30	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37
200	40	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37
	50	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37

Ceiling Speakers (CS1EZ, SM1EZ)

- Obtain the length, width, and ceiling height of the area.
- Look up where the **length** and **width** of the area meet on the chart.
- You will find three color-coded numbers. Use the **RED** number for 8 ft. ceilings, **BLUE** for 10 ft. ceilings, and **GREEN** for 12 ft. ceilings. The color-coded number that corresponds to the area's **ceiling height** is the general number of speakers the installation requires.

The **minimum amplifier power** needed (in watts) is equal to the total number of CS1EZ or SM1EZ speakers required in the area for uniform coverage.

Amplifier Power (min.) = Number of CS1EZ or SM1EZ Speakers

Example:

An office area, using CS1EZ Ceiling Speakers (or SM1EZ Surface-Mount Ceiling Speakers), is 100 feet long by 70 feet wide by 10 feet high. Crisscross the length (100 feet) and width (70 feet) on the chart. You will find three color-coded numbers: **27**, **18**, and **12**. Since blue numbers are used for ceiling heights of 10 feet, 18 is the recommended quantity of CS1EZ speakers needed for this application. This number (18) is also the minimum amplifier power needed (in watts) for this area.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.

Horn Loudspeakers (HS7EZ, HS15EZ, HS30EZ)

- Obtain the **square footage** of the area to be covered and its ambient noise level.
- Where the area's square footage intersects the area's **ambient noise level**, you will find two numbers.

The number in **BLUE** is the typical **number of horn loudspeakers** the installation requires. Additional speakers may be needed in areas that have obstructions, like shelving, that block sound dispersion.

The number in **RED** is the **minimum amplifier power** needed (in watts) for the installation.

Amplifier Power (min.) = Number in RED

Example:

A factory has 35,000 square feet of open area and an average ambient noise level of 80 dB. Thus, it will require HS15EZ Horn Loudspeakers. Using the chart for the HS15EZ speaker, crisscross the square footage and the ambient noise level. The number of horn loudspeakers needed for an installation is shown in blue and the minimum amplifier power for this number of speakers is shown in red. As you can see, 6 speakers are needed for this application and the minimum amplifier power needed is 90 watts.

HS7EZ Horn Loudspeaker



Use this chart to determine the number of HS7EZ Horn Loudspeakers a particular installation will require, based on the size of the area and the ambient noise level of the environment.

HORN QTY. & MIN. POWER (WATTS) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																			
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
55-65 dB Low Noise - speech is easy	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
	8	8	15	15	23	23	30	30	38	38	45	45	53	53	60	60	68	68	75	75
65-75 dB Medium Noise - must raise voice to be heard	1	2	3	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17
	8	15	23	30	38	38	45	53	60	68	75	75	83	90	98	105	113	113	120	128

The # in **BLUE** is the # of speakers.

The # in **RED** is the minimum amplifier power required.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.

HS15EZ Horn Loudspeaker



Use this chart to determine the number of HS15EZ Horn Loudspeakers a particular installation will require, based on the size of the area and the ambient noise level of the environment.

HORN QTY. & MIN. POWER (WATTS) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																			
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
75-85 dB High Noise - speech is difficult	1	2	3	4	5	5	6	7	8	9	10	10	11	12	13	14	15	15	16	17
	15	30	45	60	75	75	90	105	120	135	150	150	165	180	195	210	225	225	240	255
85-95 dB Very High Noise - speech almost impossible	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40
	30	60	90	120	150	180	210	240	270	300	330	360	390	420	450	480	510	540	570	600

The # in **BLUE** is the # of speakers.

The # in **RED** is the minimum amplifier power required.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.

HS30EZ Horn Loudspeaker



Use this chart to determine the number of HS30EZ Horn Loudspeakers a particular installation will require, based on the size of the area and the ambient noise level of the environment.

HORN QTY. & MIN. POWER (WATTS) BASED ON AMBIENT NOISE	SIZE OF AREA TO BE COVERED (THOUSANDS OF SQUARE FEET)																			
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
85-95 dB Very High Noise - speech almost impossible	1	2	3	4	6	7	8	9	10	11	12	13	14	16	17	18	19	20	21	22
	30	60	90	120	180	210	240	270	300	330	360	390	420	480	510	540	570	600	630	660

The # in **BLUE** is the # of speakers.

The # in **RED** is the minimum amplifier power required.

NOW, TURN TO PAGE 21 TO SELECT AMPLIFIER.

For Applications over 100 dB, Contact Bogen for Assistance.

2 Determine the Number of Speakers Needed (cont.)



WB1EZ Wall Baffle Speaker

Use this chart to determine the number of WB1EZ speakers a particular installation will require, based on the dimensions of the area.

Wall Baffle Speaker (WB1EZ)

- Obtain the **length** and **width** of the area.
- Where the length and width of the area crisscross on the chart, you will find the typical **number of speakers** that the installation requires.

The **minimum amplifier power** needed (in watts) is equal to the total number of WB1EZ speakers required in the area for uniform coverage.

Amplifier Power (min.) = Number of WB1EZ Speakers

Example:

An area's dimensions are 150 ft. long by 110 ft. wide. Crisscross these two dimensions on the chart and you will find that 28 WB1EZ Wall Baffle Speakers are needed for this application. This number (28) is also the minimum amplifier power needed (in watts) for this area.

Mixed Speaker Type Applications

For applications with more than one type of speaker:

- Determine the number of speakers and the minimum amplifier power needed for each type of speaker separately.
- Add together the minimum amplifier power needed for each type of speaker to obtain the minimum amplifier power needed for the entire application.

Example:

An application requires 10 SM1EZ Surface-Mount Ceiling Speakers (minimum amplifier power needed is 10 watts), 5 HS15EZ Horn Loudspeakers (minimum amplifier power needed is 75 watts), and 10 WB1EZ Wall Baffle Speakers (minimum amplifier power needed is 10 watts). Add together the minimum amplifier power needed for each type of speaker: 10 watts + 75 watts + 10 watts. The sum is 95 watts. This is the minimum amplifier power needed (in watts) for the entire application.

Look Up LONGER Dimension Of Area On This Side		20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200
20	1	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	6	6
30	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	10	10
40	3	3	4	5	5	6	7	7	8	9	9	10	11	12	12	13	14	15	16	17
50	4	4	5	6	7	8	8	9	10	11	12	13	14	15	16	17	18	19	20	20
60	6	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25
70	8	8	9	11	12	13	15	16	17	19	20	21	23	24	26	27	28	30	31	32
80	11	11	12	13	15	16	17	19	20	21	23	24	26	28	29	31	33	35	37	38
90	14	14	15	16	18	20	21	23	24	26	27	28	30	32	33	35	37	39	42	44
100	17	17	18	20	22	23	25	27	28	30	32	33	35	37	39	42	45	47	50	52
110	20	20	22	24	26	28	29	31	33	35	37	39	42	45	47	50	52	56	58	60
120	24	24	26	28	30	32	34	36	38	40	42	44	47	50	52	56	58	60	64	66
130	28	28	30	33	35	37	39	42	44	47	50	52	56	58	60	64	66	70	72	74
140	33	33	35	37	40	42	45	47	50	52	56	58	60	64	66	70	72	74	78	80
150	33	33	40	43	45	48	51	52	56	58	60	64	66	70	72	74	78	80	84	86
160	43	43	45	48	51	52	56	58	60	64	66	70	72	74	78	80	84	86	90	92
170	48	48	52	54	56	60	62	64	66	70	72	74	78	80	84	86	90	92	96	98
180	54	54	58	60	62	64	66	70	72	74	78	80	84	86	90	92	96	98	102	104
190	60	60	62	64	66	70	72	74	78	80	84	86	90	92	96	98	102	104	108	110
200	66	66	68	70	72	74	78	80	84	86	90	92	96	98	102	104	108	110	114	116

3 Select An Amplifier

Once you determine the number of speakers and the minimum amplifier power for the installation, you are ready to select the system amplifier. A 70V paging amplifier is very easy to select.

- Locate amplifiers on the chart that have a **wattage equal to or higher** than the minimum amplifier power of your application. (Amplifiers with power capacities greater than this number will not damage the speakers. The extra power available is simply not used.)
- Determine the **amplifier features** needed for the application (see the Site Survey Check List on page 72 and the Amplifier Features Chart on page 78).
- Using the chart on page 78, **find an amplifier** that offers these features. As long as the wattage of the selected amplifier is equal to or higher than the minimum amplifier power, the amplifier will work well for the application.

If you think the application's system may need to expand in the future (this is often the case with new constructions and relocating companies), you may want to select an amplifier with a greater power capacity now.

Example:

An application requiring 18 CS1EZ Ceiling Speakers requires a minimum amplifier power of 18 watts, so an amplifier with a power rating of 18 watts minimum is needed. Now, look at the chart on page 78 to determine which amplifiers provide the necessary wattage to drive the speakers as well as provide the amplifier features that are most appropriate for the installation. Since the minimum wattage needed is 18, the amplifier with the lowest power usable for this installation is 20 watts (model C20). However, if the C20 does not have the features required for the application, such as bass and treble controls, you can select any amplifier of greater wattage that offers the specific features. For instance, you might select the TPU35B or C35. Both of these amplifiers have a higher wattage than the application's minimum amplifier power needed and provide the desired features because they have bass and treble controls. Either of these amplifiers will work well for this application. Plus, there is room to expand the system on a 35W or higher amplifier without the need to purchase an additional amplifier in the future.

The Amplifier Features Chart outlines the features and power ratings of Bogen amplifiers that can be used for a variety of application needs. For complete chart, see page 78.

A POWER

Locate a power rating that is higher than the application requires (allowing for future system expansion).

B FEATURES

Find the amplifier features that the application requires.

Amplifier Output Power Rating/ Channel	Model Numbers	Amp Channels	Input Types				Signal Processing					Music Muting			MODH Output	Night Ringer	Fluoresc Volume	Output Meter	Mounting			Page Number
			TEL Input* 60V-0V/ 80V-0V	MIC Input* 0V-240V/ 0V-240V	ANY Input* 0V-240V/ 0V-240V	Balanced Inputs 0V-240V	Modular Inputs	Audio Enhancement	Loudness Controller	ALC	EQ	Bass/Treble	Tone Control	Variable Mute					Auto Mute	Manual Mute	Wall Mount	
1.5W	GA2	1																				42
6W	GABA	1		1																		42
10W	C18	1	1	2 (1)	0 (1)																	42
10W	C10MODH	1	1	2 (1)	0 (1)																	42
15W	TPU15A	1	1		1																	43
20W	C20	1	1	2 (1)	0 (1)																	42
35W	C35	1	1	2 (1)	1 (2)																	42
35W	GS35	1	0 (1)	6 (4)	1 (2)																	41

C MODEL NUMBER

Select the amplifier model(s) best suited for your application.

D REFERENCE PAGE

Turn to the page number indicated for more information about the product you need.

REFER TO CHART ON PAGE 78

Easy Design™ Is Easy!

That's all it takes to design a robust, high-quality paging system with Bogen's Easy Design line.