

BOGEN

DROP-IN CEILING SPEAKERS

EASY TO INSTALL CEILING TILE SPEAKERS - SIMPLY CONNECT AND DROP INTO PLACE



**2 Colors:
Off-white and
Bright White**



Available In A Variety of Styles to Meet Your Needs


CSD1X2

- 1 ft. x 2 ft. with back can enclosure
- 70V/25V, 4W transformer (4, 2, 1, 0.5, 0.25 watt) taps; selected by rotary switch
- 8" main speaker cone with 10 oz. magnet, plus secondary high-frequency cone
- Front-mounted, recessed volume control available (VR)



CSD1X2NB

- 1 ft. x 2 ft. exposed driver (no back can enclosure)
- 70V/25V, 4W transformer (4, 2, 1, 0.5, 0.25, 0.125 watt) taps; selected by stripped and finned leads
- 8" main speaker cone with 6 oz. magnet
- Front-mounted, recessed volume control available (VR)

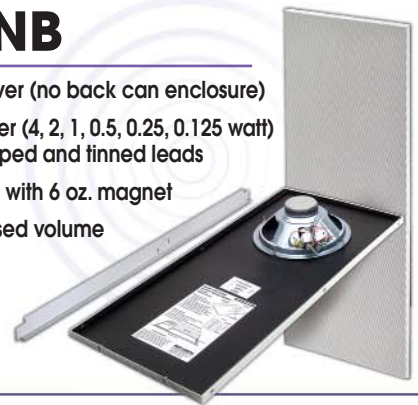

CSD2X2

- 2 ft. x 2 ft. with back can enclosure
- 70V/25V, 4W transformer (4, 2, 1, 0.5, 0.25 watt) taps; selected by rotary switch
- 8" main speaker cone with 10 oz. magnet, plus secondary high-frequency cone
- Front-mounted, recessed volume control available (VR)



CSD2X2L

- 2 ft. x 2 ft. with back can enclosure
- Low-impedance: 8-ohm speaker, 15W maximum power
- 8" main speaker cone with 10 oz. magnet, plus secondary high-frequency cone



ACD2X2

- 2 ft. x 2 ft. with back can enclosure
- Self-contained 1-watt amplifier
- For 24V, self-amplified systems, or as add-on to expand other systems
- 8" main speaker cone with 10 oz. magnet, plus secondary high-frequency cone
- Front-mounted, recessed volume control



CSD1X2, CSD2X2, and ACD2X2 Series Drop-In Ceiling Speakers

All Models Feature:


Finely perforated grille over entire front of speaker • Industrial-grade Steel Construction
 Choose Bright White or Off-white Grille Finish • Support Rail Crossbar (included) • Seismic Attachment Points

These ceiling speakers are fast and easy to install, and fit into standard 2 ft. x 2 ft. or 2 ft. x 4 ft. grids.

- 1 Place speaker in ceiling grid.
- 2 Make a simple cut to the ceiling tile (if necessary).
- 3 Lay support rail crossbar across ceiling grid (if necessary).
- 4 Drop speaker into place.

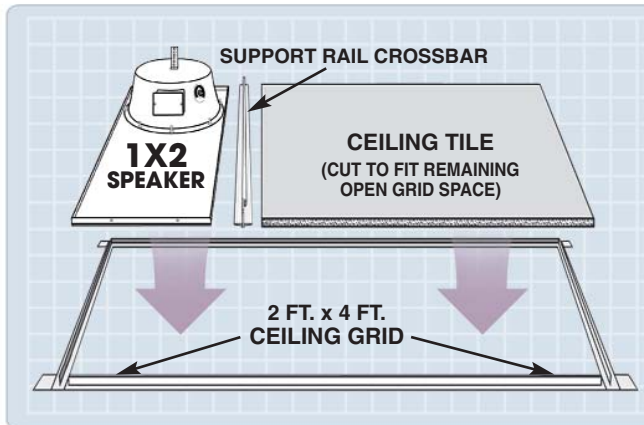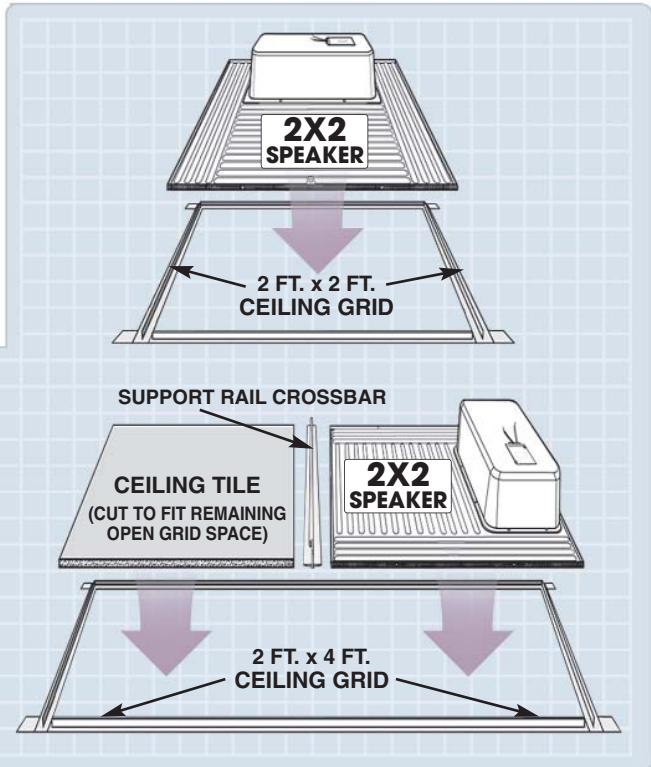

Model	Speaker Size		Grille Color	Impedance			Speaker Back Can	Exposed Driver	Recessed Volume Control
	1 ft. x 2 ft.	2 ft. x 2 ft.		Off-white	Bright White	70V/25V (4W max.)			
CSD1X2	●		●		●				
CSD1X2U	●			●	●		●		
CSD1X2VR	●		●		●		●		●
CSD1X2VRU	●			●	●		●		●
CSD1X2NB	●		●		●		●		
CSD1X2NBU	●			●	●		●		
CSD1X2NBVR	●		●		●		●		●
CSD1X2NBVRU	●			●	●		●		●
CSD2X2		●	●		●		●		
CSD2X2U		●		●	●		●		
CSD2X2VR		●	●		●		●		●
CSD2X2VRU		●		●	●		●		●
CSD2X2L		●	●			●	●		
CSD2X2LU		●		●		●	●		
ACD2X2		●	●			●	●		●
ACD2X2U		●		●		●	●		●

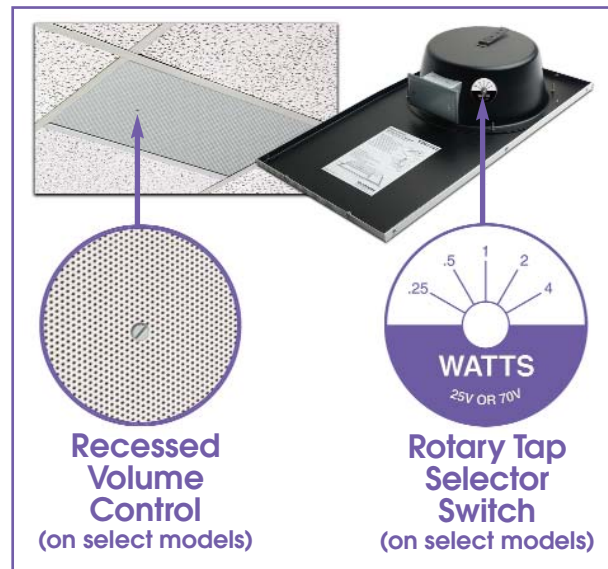

For complete specifications of all models, visit: www.bogen.com