

BCAP Series IP Square Clock (V5.1)

Features:

- Available in 9" (22.8cm), and 12" (30.4 cm) dial sizes
- Offered in a stylish ABS case
- Power over Ethernet (802.3af standard)
 - Power and data are provided through one standard network cable (CAT 5, CAT 5e, or CAT 6)
- Provided with mounting hardware for easy installation
- Hour, minute, and second hands
- Quick correction for time change (max. 5 minutes)
- Microprocessor based movement
- Side molded, polycarbonate crystal

Highlights:

- Designed and Produced in the United States of America
- Built-in web interface - each clock has a built in web interface allowing the user to set, control, and monitor the IP clock
 - Built-in web interface settings include: Network settings, NTP server selection, UTC/GMT offset selection, automatic Daylight Saving Time adjustments, and much more!
- Receives time data from one of ten pre-programmed third party NTP servers (user changeable) for added reliability and redundancy. Alternatively, it can be set to receive the time data from an in-house NTP Server or from any Bogen Master Clock model.
- Built-in self-diagnostics and email alerts for:
 - NTP Synchronization Timeouts
 - Power resets
 - Hand position errors and corrections
- Interfaces with Bogen's IP Clock Monitor software which will allow the user to view, monitor, and send various commands to all IP clocks in the system
- Custom Color Cases available (minimum quantity 25)



BCAP Series IP Square Clock (V5.1)

Specifications:

Case Material:

ABS

Case Color:

Standard black or white back case, metallic gray front rim (custom colors available)

Dial Face:

12 or 24 (military) hour standard

Specialty dials available

Dial Material:

Durable polystyrene

Crystal Material:

Shatter-proof, side-molded, transparent polycarbonate

Voltage Input:

48 VDC (PoE model)

Average Current Consumption:

70mA @ 48 VDC (PoE Class 1)

Hand tolerance:

Minute hand: +/- 1/4 minute

Second hand: +/- 1/2 second

Temperature range:

Operating: 32°F - 113°F (0°C - 45°C)

Shelf: 5°F - 167°F (-15°C - 75°C)


Compliance:

UL, cUL listed




Ordering Information:

BCAP Series IP Square Clock: BCAP-4XS-XXS-0-XX

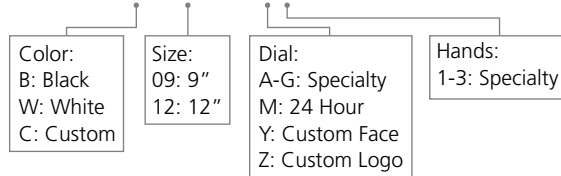

Double Mount Pole: BCAB-4XD-XXS-0

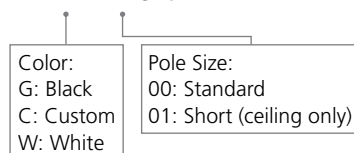

Note: Purchasing double mounted square analog clocks will require two clocks using the clock part number and one double mount pole using the part number above.



Examples:

BCAP-4WS-09S-0: Bogen Analog, IP, 9" Square, Surface Wall Mount, White Case with Metallic Gray Rim

BCAP-4BS-12S-0: Bogen Analog, IP, 12" Square, Surface Wall Mount, Mineral Black Case with Metallic Gray Rim

BCAP Series IP Square Clock (V5.1)

Bogen Square Analog Clock Dimensions

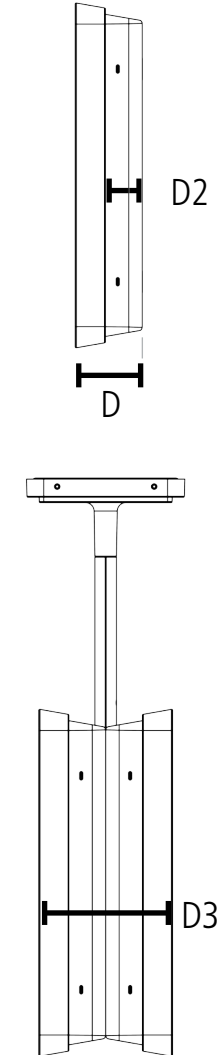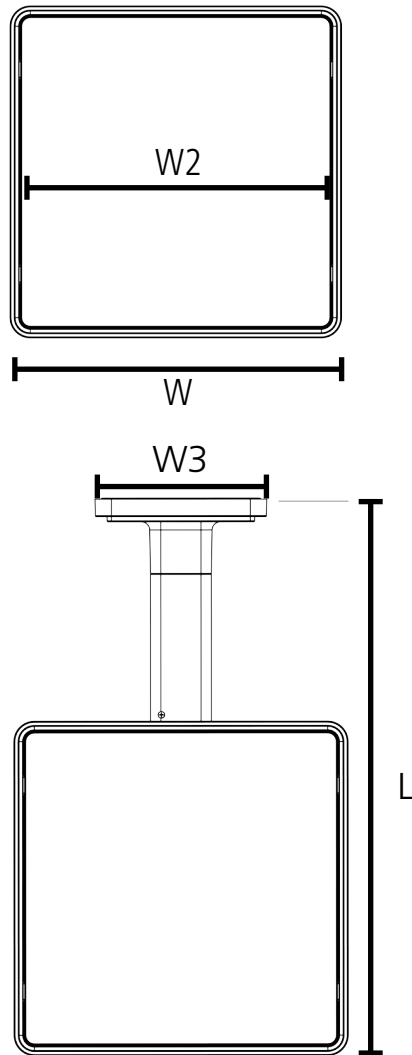


	9" Square	12" Square
Clock Size:	W = 9.79" (24.9cm) W2 = 8.97" (22.8cm) D = 2.44" (6.2cm) D2 = 1.34" (3.4cm)	W = 12.76" (32.4cm) W2 = 11.94" (30.3cm) D = 2.44" (6.2cm) D2 = 1.34" (3.4cm)
Shipping Weight:	3.0lbs (1.81kg)	4.0lbs (1.81kg)
Double/Dual Mount Dimensions:	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)	W3 = 6.56" (16.7cm) D3 = 4.93" (12.5cm)
Adjustable Pole Height for standard pole*:	L3 = 18.32" (46.5cm)	L = 21.12" (53.6cm) L = 19.35" (49.1cm)
Shortened Pole Height:	L = 12.38" (31.4cm)	L = 15.50" (39.3cm)

*Standard pole refers to part number BCAB-4GD-00S-0


**Shortened pole (ceiling mount only) refers to part number BCAB-4GD-01S-0

BCAP Series IP Square Clock (V5.1)


Hand & Dial Options




Standard Hands




Specialty Hands 1




Specialty Hands 2




Specialty Hands 3




Standard Dial




Dial M
(Military 24 Hours)




Dial A

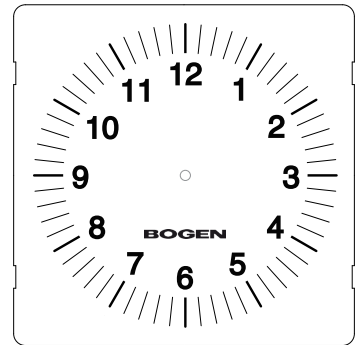


Dial B



Dial C




Dial D




Dial E



Dial F



Dial G



Dial Z

Specialty Hands 1-3 & Specialty
Dials A-Z are offered at an
additional cost.

For more information please contact
your Bogen Representative.