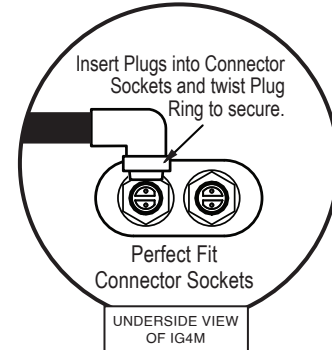# NEARSCAPES ™
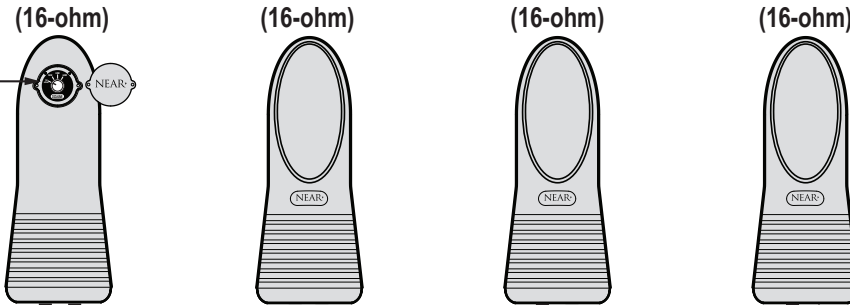
## NEARSCAPES IG44.1DSP - QUICK START WIRING CONNECT GUIDE

REAR VIEW OF IG4M (Protective Cover removed)

16W  32W  64W
16 ohm

IG4M

— IG4M LOUDSPEAKERS —

(16-ohm)　(16-ohm)　(16-ohm)　(16-ohm)

NEAR

Insert Plugs into Connector Sockets and twist Plug Ring to secure.

Perfect Fit Connector Sockets
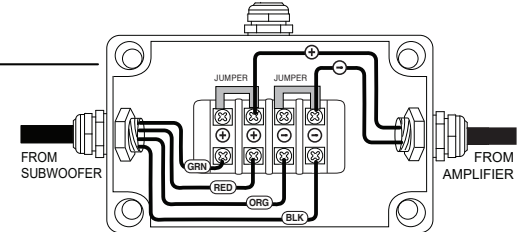
UNDERSIDE VIEW OF IG4M

Each **IG4M Loudspeaker** is set to 16-ohm (factory setting). This result is a 4-ohm load at the **NQ-A2120-G2 Amplifier**. The **IGS100M Subwoofer** is wired as a 4-ohm speaker (there are two voice coils in parallel). RED/GREEN twisted together, BLACK/ORANGE twisted together, if IE1 Junction Box is not used.
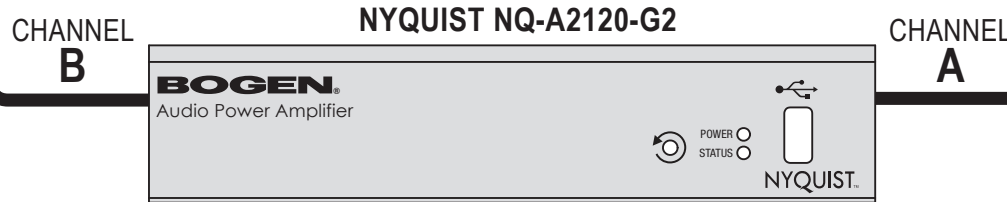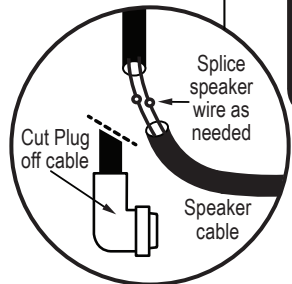
20 ft. cable with Perfect Fit connectors is supplied with each IG4M Speaker.

**IGS100M SUBWOOFER**
**(4-ohm)**

IE1

**IE1 JUNCTION BOX**

JUMPER  JUMPER  +  −

FROM SUBWOOFER

GRN
RED
ORG
BLK

FROM AMPLIFIER

Add 16g or greater wire from the **NQ-A2120-G2** to the **IE1**.

CHANNEL
B

CHANNEL
A

**NYQUIST NQ-A2120-G2**

**BOGEN**®
Audio Power Amplifier

POWER ○
STATUS ○

NYQUIST ™

Splice speaker wire as needed

Cut Plug off cable

Speaker cable

**Channel A - IGS100M**
**Channel B - LB4TM/IG4M**

# NEAR®

## NOTHING COMES CLOSER

NEAR® is a Division of Bogen Communications LLC

**www.bogen.com/near**