



APL-220

SELF-POWERED COMPACT LOUDSPEAKER

DESCRIPTION:

The internally-powered and bi-amped APL-220 is designed for applications requiring extremely high power and tight directional control. It is fully arrayable with extended high-end for superb sonic performance.

ADVANCED TECHNOLOGIES:

Patented all-digital amplifier operating at 460 kHz provides high power levels with extremely low distortion. State-of-the-art digital processing circuits render pristine sound quality. Advanced limiter algorithms provide precise system control without harming sound quality at even the most aggressive levels. Universal AC voltage compatibility with power factor correction.

POWER AMPLIFIERS:

Dual 500W amplifiers, total 1000W output

DRIVER COMPLEMENT:

LOW-FREQUENCY: One Apogee 12" (305mm) permanent magnet cone-type driver is treated with a waterproofing compound, providing resistance to moisture, and enabling long-term stability of cone resonance and cone mass parameters; also treated with Ferrofluid® for greater power handling capability, lower distortion, and control of short-term impedance rise

HIGH-FREQUENCY: One Apogee 2" (51mm) throat compression driver is treated with Ferrofluid

HANDLES:

Two handles designed as an integral part of the enclosure (no moving parts)

GRILLE:

Powder-coated, diamond-punched steel with acoustic foam covering

TRIM:

Optional protective steel trim on edges; powder-coated for durability

RIGGING HARDWARE:

Four 12 gauge steel nutplates, mounted two on top and two on bottom, recessed so as to be nominally flush; accepts 3/8"-16 thread, nutplates are backed with 12 gauge steel internal brackets (10mm nutplate or Aeroquip™ Pan fittings optional)

ENCLOSURE TYPE:

20° trapezoidal, optimally-vented bass

CABINET CONSTRUCTION:

Multi-ply Finland birch with stainless steel fasteners


WARRANTY:

Three (3) years, limited

ENGINEERING DATA:


FORMAT:

POLAR MEASUREMENTS (6 dB/division, normalized)

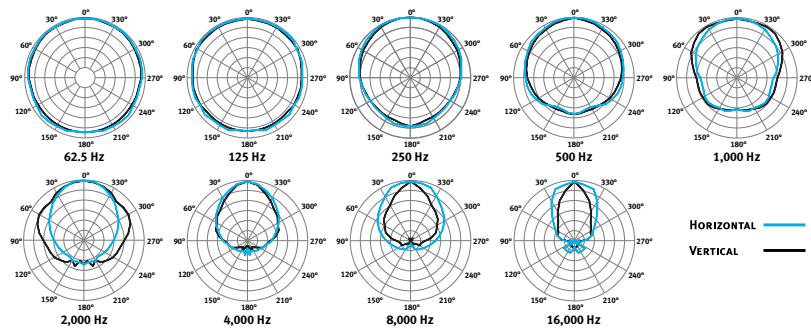


All polar measurements obtained in a free-field environment at 10° increments.

FREQUENCY RESPONSE (10 dB/division)

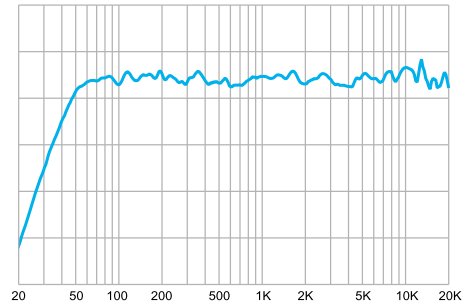


Measured in a free-field anechoic environment using a swept one-third octave input.

LINE AC PANEL

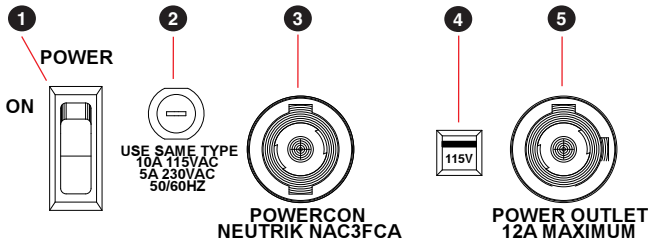


- 1 POWER SWITCH
- 2 MAIN AC PROTECTION FUSE
- 3 AC INPUT CONNECTOR, NEUTRIK POWERCON NAC3FCA
- 4 AC LINE VOLTAGE SELECTION SWITCH
- 5 AC OUTPUT CONNECTOR, NEUTRIK POWERCON NAC3FCB

AUDIO INPUT PANEL

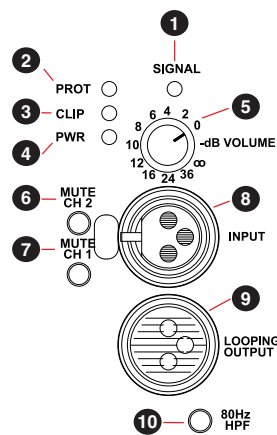

- 1 SIGNAL PRESENCE INDICATOR
- 2 SYSTEM PROTECTION INDICATOR
- 3 AMPLIFIER CLIP INDICATOR
- 4 SYSTEM POWER INDICATOR
- 5 VOLUME CONTROL
- 6 CH 2 MUTE SWITCH (LF CHANNEL)
- 7 CH 1 MUTE SWITCH (HF CHANNEL)
- 8 BALANCED LINE AUDIO INPUT, XLR
- 9 BALANCED LINE AUDIO LOOP-THROUGH, XLR
- 10 HIGH PASS FILTER ENGAGEMENT SWITCH

DIMENSIONAL DRAWINGS

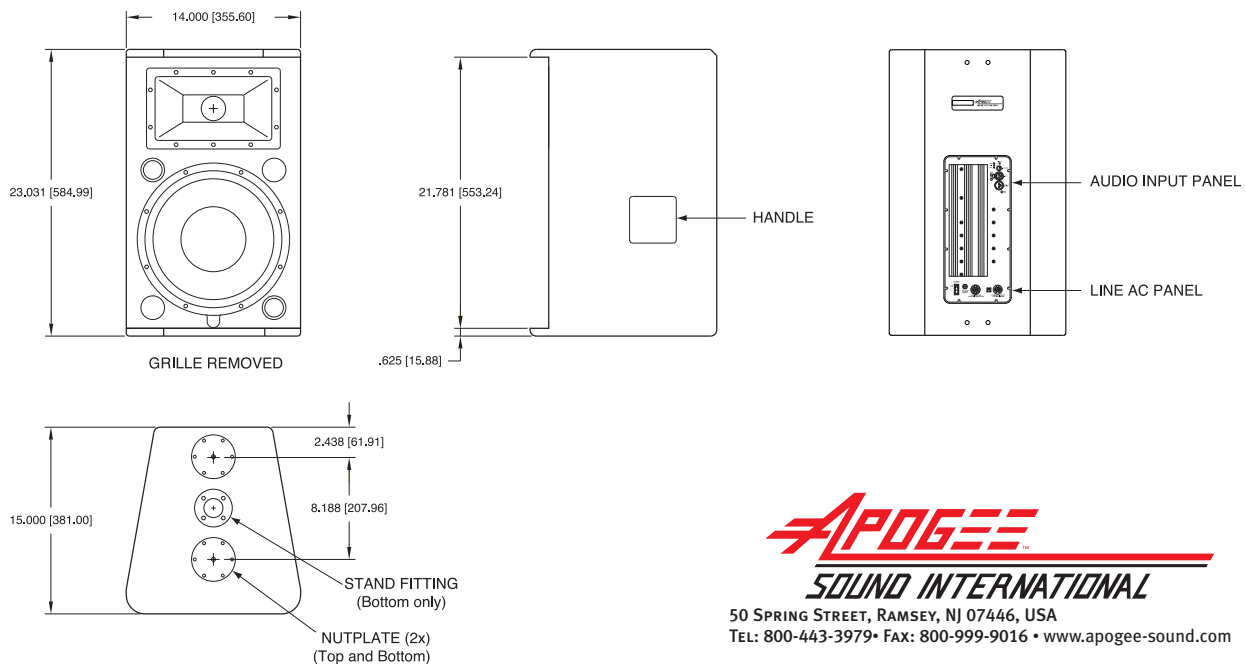

APOGEE
SOUND INTERNATIONAL

50 SPRING STREET, RAMSEY, NJ 07446, USA
TEL: 800-443-3979 • FAX: 800-999-9016 • www.apogee-sound.com