



4-Channel Audio Power Amplifiers Configuration Manual NQ-A4060, NQ-A4120, NQ-A4300

BOGEN[®]
COMMUNICATIONS, INC.

2019 Bogen Communications, Inc.

All rights reserved.

740-00099D

191101

Contents

List of Figures	v
------------------------------	----------

List of Tables	vii
-----------------------------	------------

Configuring the Four-Channel Audio Power Amplifiers 1-1

1	Using the Dashboard	3
2	Updating Firmware	4
3	Setting Network Tab Parameters	6
4	Setting Configuration Tab Parameters	8
5	Accessing Log Files	10
6	Setting DSP Parameters	13
6.1	Setting the Channel Level	15
6.2	Signal LED, Clip LED, and VU Meter	15
6.3	Muting a Channel	16
6.4	Adjusting Volume Levels	16
6.5	Adjusting Compression Settings	16
6.6	Adjusting the Graphic Equalizer	18
6.7	Setting High/Low Pass Parameters	20
6.8	Adjusting the Limiter	23
6.9	Adjusting Noise Gate Settings	24
6.10	Adjusting Parametric Equalizer Settings	25
6.11	Adjusting Router Settings	27
6.12	Settings	28
6.13	Signal Present	30
6.14	Status	32

List of Figures

Figure 1, Nyquist Appliance Login	2
Figure 2, Matrix Mixer Pre-Amp Dashboard	2
Figure 3, Firmware Update Page	5
Figure 4, Network Settings	6
Figure 5, Appliance Configuration Settings	9
Figure 6, Logs	11
Figure 7, DSP Page with Channel Drop-Down Menu	13
Figure 8, Compressor Settings	17
Figure 9, Graphic EQ Settings	18
Figure 10, High/Low Pass Parameters	20
Figure 11, Limiter Settings	23
Figure 12, Noise Gate Settings	24
Figure 13, Parametric Equalizer Settings	25
Figure 14, Router	27
Figure 15, Router for Single Channel Bridged Mode and 2 Mono Mode Channels	28
Figure 16, Settings Parameters for 2 Channel Mono	29
Figure 17, Settings Parameters for 2 Single Channel Bridged ...	29
Figure 18, Signal Present Parameters	31
Figure 19, Status for 2 Channel	32
Figure 20, Status When Channels 1 and 2 Are Bridged	32

List of Tables

Table 1, Appliance Dashboard Read-Only Fields	3
Table 2, Appliance Dashboard Buttons	3
Table 3, Network Settings	7
Table 4, Configuration Settings	9
Table 5, Device Stations Settings	10
Table 6, Logs	12
Table 7, DSP Page	14
Table 8, Compressor Settings	17
Table 9, High Pass/Low Pass Parameters	21
Table 10, Limiter Settings	23
Table 11, Noise Gate Settings	25
Table 12, Signal Present Parameters	31
Table 13, Status	33

Configuring the Four-Channel Audio Power Amplifiers

Bogen's Nyquist-based networked four-channel audio power amplifiers (NQ-A4060, NQ-A4120, NQ-A4300) support small, medium, and large Nyquist intercom solutions in schools and in commercial paging and public address solutions.

Available in 240, 480, and 1200-watt models, the audio power amplifiers provide flexibility and versatility without the need for add-on modules. Each model offers state-of-the-art, built in Digital Signal Processing (DSP) software that includes factory loudspeaker presets and that turns the amplifier into a complete audio solution.


A short press of the appliance's **Reset** button reboots the device. If you press the **Reset** button for 10 seconds, the appliance returns to the factory default configuration settings. Returning to the default configuration settings does not change the appliance's firmware.

The following sections describe the process for manual configuration. For information about using Nyquist's automatic configuration process, refer to the **Nyquist System Administrator Manual**.

Note: Do not use third-party Chrome browser extensions with the Nyquist user interface.

To access the appliance's UI:

- Step 1 Access the appliance's web UI by doing one of the following:
- a On your web browser, enter the IP address for the appliance as the URL.
 - b From the Nyquist web UI navigation bar, select **Stations**, select **Stations Status**, navigate to the device that you want to configure, and then select the **Link** icon.

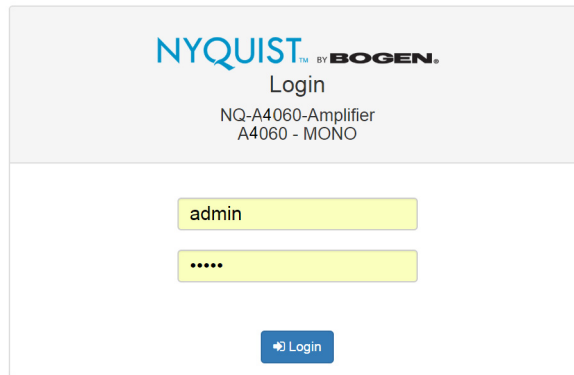


The login page features the 'NYQUIST BY BOGEN' logo at the top. Below the logo, the text 'Login' is centered, followed by 'NQ-A4060-Amplifier' and 'A4060 - MONO'. There are two input fields: the first contains the username 'admin' and the second contains a masked password '.....'. A blue 'Login' button is positioned at the bottom right of the form area.

Figure 1, Nyquist Appliance Login

Step 2 At the Nyquist Appliance - Login page, enter username and password, and then select **Login**.

The default username is **admin**; the default password is **bogen**.

The dashboard for the selected appliance appears.

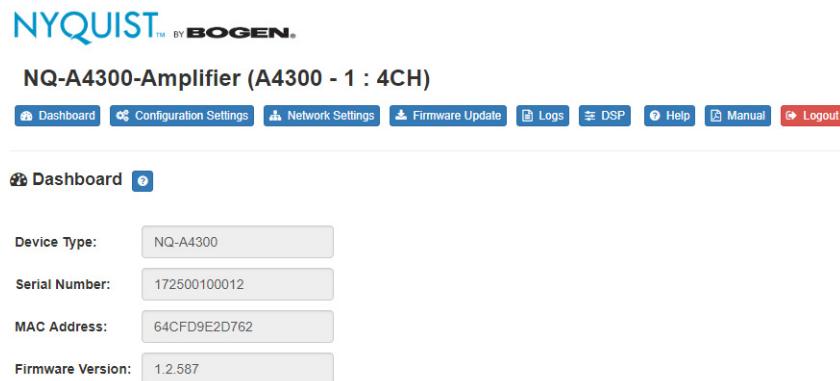

The dashboard header includes the 'NYQUIST BY BOGEN' logo and the title 'NQ-A4300-Amplifier (A4300 - 1 : 4CH)'. A navigation bar contains links for Dashboard, Configuration Settings, Network Settings, Firmware Update, Logs, DSP, Help, Manual, and Logout. The main content area, titled 'Dashboard', displays device information in a table-like format:

Device Type:	NQ-A4300
Serial Number:	172500100012
MAC Address:	64CFD9E2D762
Firmware Version:	1.2.587

Figure 2, Matrix Mixer Pre-Amp Dashboard

1 Using the Dashboard

The dashboard displays the following read-only fields:

Table 1, Appliance Dashboard Read-Only Fields

Device Type	Identifies the physical device used by the station.
Serial Number	Identifies the serial number for the device.
MAC Address	Specifies the Media Access Control (MAC) address, which is a unique identifier assigned to network interfaces for communications on the physical network segment.
Firmware Version	Provides the firmware version installed on the station.

The dashboard also contains the following buttons:

Table 2, Appliance Dashboard Buttons

Dashboard	Refreshes the dashboard.
Configuration Settings	Accesses the Configuration Settings page where you can either manually set various options, such as the SIP Username, or select to receive configuration settings from the server.
Network Settings	Accesses the Network Settings page where you can view and set network settings, such as the static IP address.
Firmware Update	Accesses the Firmware Update page where you can view the current Nyquist version, check for updates, restore factory settings, and reboot the appliance.
Logs	Accesses log files, which record either events or messages that occur when software runs and are used when troubleshooting the appliance.
DSP	Accesses the DSP page where you can view and set parameters for Digital Signal Processing (DSP).

Table 2, Appliance Dashboard Buttons

Help	Accesses the appliance's online help.
Manual	Displays the appliance's configuration manual.
Logout	Logs out of the appliance's dashboard.

2 Updating Firmware

When you select **Firmware Update** from the appliance's web UI, the Firmware Update page appears. From this page you can determine which Nyquist version the appliance is using and if an update is required. You can also use this page to restore factory settings and to reboot the appliance.

Note: A Nyquist appliance connected to the Nyquist network receives a configuration file from the Nyquist server that includes the latest firmware available from the server. If the firmware is later than the one installed on the appliance, an automatic firmware update occurs unless the **Firmware** parameter for the station is left blank. Refer to the *Nyquist System Administrator Manual* for more information.

Firmware Update

✓ Current Nyquist Version: 0.9.765
New Nyquist Version: None

 Upload Firmware

 Restore Factory Settings

 Reboot Appliance

Figure 3, Firmware Update Page

To use the Firmware Update page:

- Step 1 On the appliance web UI's main page, select **Firmware Update** to ensure you have the latest firmware version.
- Step 2 Select **Upload Firmware** to upload firmware from the server to the appliance.

If you select this option, a popup screen appears that allows you to select the file that you want to upload. You can navigate to the file's location. After you select the file, select **Upload**. If Nyquist discovers a new firmware version, the Firmware Update page displays an **Update Firmware** button. Select this button if you want to update the appliance's firmware to the new version.
- Step 3 If you want to return your appliance to its original state (undoing firmware updates), select **Restore Factory Settings**.
- Step 4 Select **Reboot Appliance** to restart your appliance.

3 **Setting Network Tab Parameters**

Network settings can be configured dynamically by the Nyquist server or manually by using the appliance's web UI.

To manually configure network settings:

- Step 1 On the appliance web UI's main page, select **Network Settings**.
- Step 2 Select your desired network settings.
- Step 3 Select **Save**.

Network Settings

Static IP:	172.31.100.2
Netmask:	255.255.255.0
Gateway:	172.31.100.1
VLAN ID:	100
VLAN Priority:	5 - Voice ▾
NTP Server:	pool.ntp.org
TFTP Server:	172.31.100.1
DHCP Server Override:	Yes ▾
DHCP Enabled:	Yes ▾
Reboot Appliance:	No ▾

 Save

Figure 4, Network Settings

Network settings are described in the following table:

Table 3, Network Settings

Static IP	Identifies the fixed IP address assigned to the appliance by a system administrator.
Netmask	Identifies the subnetwork subdivision of an IP network.
Gateway	Identifies the address, or route, for the default gateway.
VLAN ID	Identifies the Virtual Local Area Network (VLAN) for this appliance. Values range from 0 to 4094.
VLAN Priority	Identifies the priority of the network traffic on the VLAN. Priority can range from 0 through 7.
NTP Server	Identifies the IP address or the domain name of the Network Time Protocol (NTP) Server. This field is read only.
TFTP Server	Identifies the IP address of the Trivial File Transfer Protocol (TFTP) server. TFTP is used by Nyquist VoIP phone and appliance provisioning. A TFTP server runs on the Nyquist server on port 69 (the standard TFTP port #).
	Device provisioning files are stored on the Nyquist server in directory: <code>/srv/tftp</code> . This is the only directory exposed by the TFTP server.
DHCP Server Override	Indicates if you want to override the TFTP server information provided by the Dynamic Host Configuration Protocol (DHCP) via option_66.
	DHCP supplies IP addresses to the Nyquist server and associated devices. It also supplies the TFTP server IP address or name via option_66.

Table 3, Network Settings (Continued)

DHCP Enabled	Indicates if the device is enabled to use DHCP.
Reboot Appliance	Allows you to save the network options and reboot the appliance.

4 Setting Configuration Tab Parameters

The easiest way to configure Nyquist appliances is to obtain configuration settings from the Nyquist server by selecting **Get Configuration From Server**. However, you can manually configure an appliance through the appliance's Web UI.

Note: Manual configuration will be overwritten by the server once the appliance is connected and discovered by the server.

To manually configure your Nyquist appliance:

- Step 1 On the appliance Web UI's main page, select **Configuration Settings**.
- Step 2 Select your desired settings.
- Step 3 Select **Save**.

Configuration Settings

Get Configuration From Server

Web Username:

Web Password:

Web Confirm Password:

Server:

Local Port:

	IP Address	Port Number	Volume	Station List
Emergency-All-Call:	239.0.5.1	6001	25	1,2,3,4
All-Call:	239.0.5.2	6002	25	1,2,3,4
Audio Distribution:	239.0.5.3	6003	20	1,2,3,4
Multicast 1:	239.0.5.90	6090	20	2,3,4
Multicast 2:	239.0.5.190	60190	30	1
Multicast 3:	239.0.5.200	60200	30	2
Multicast 4:	239.0.5.210	60210	30	3
Multicast 5:	239.0.5.220	60220	30	4

Save

Device Stations

Port Number	Port Type	Account Id	Local Port	Username
1	Paging-Audio Amp	sip:119@10.10.10.168	5060	119
2	Paging-Audio Amp	sip:120@10.10.10.168	5060	120
3	Paging-Audio Amp	sip:121@10.10.10.168	5060	121
4	Paging-Audio Amp	sip:122@10.10.10.168	5060	122

Figure 5, Appliance Configuration Settings

The following table describes the Configuration tab settings:

Table 4, Configuration Settings

Web Username	Provide a web username for this appliance.
Web Password	Provide a web password for logging into the appliance.
Web Confirm Password	Re-enter the password used to log into the appliance.
Server	Identifies the IP address of the Nyquist server.
Local Port	Identifies the local port.

Table 4, Configuration Settings (Continued)

Emergency-All-Call	Identifies the IP address, port number, and volume used for emergency all-calls pages.
All-Call	Identifies the IP address, port number, and volume used for all-calls pages.
Audio Distribution	Identifies the IP address, port number, and volume used for audio distribution.
Multicast #	Identifies the multicast IP address for a zone that the speaker is included in. If a speaker is added to multiple zones, the multicast IP address for each zone appears.

The **Configuration Settings** tab also displays following information for each **Device Station** attached to the amplifier:

Table 5, Device Stations Settings

Port Number	Identifies the port number of the amplifier.
Port Type	Identifies the device type that the port connects to (Paging-Audio Amp).
Account ID	Provides the SIP account (IP address) associated with the device preceded by the extension of the device associated with this port.
Local Port	Provides the port used for SIP.
Username	Identifies the username or extension for the station associated with the port.

5 Accessing Log Files

A log file records either events or messages that occur when software runs and is used when troubleshooting the appliance. From the appliance's web-based UI, log files can be viewed directly or exported via download to your PC, Mac, or Android device and then copied to removable media or attached to an email to technical support.

To view a log file:

- Step 1 On the appliance Web UI's main page, select **Logs**.
- Step 2 From the drop-down menu, select the log that you want to view.

Multiple versions of the same log and zipped copies of the log may be available.

- Step 3 To export the file, select **Export**.
A link to a .txt file appears in the screen's lower left.



Figure 6, Logs

Available logs are described in the following table:

Table 6, Logs

Log	Description
alternatives.log	Contains information by the update-alternatives, which maintain symbolic links determining default commands.
ampws.log	Contains information about protection status and logs protection events with temperature information at the time of event.
auth.log	Contains system authorization information, including user logins and authentication methods that were used.
bootstrap.log	Contains information actions, errors, and warnings that occur during booting of the appliance.
btmp	Contains information about failed login attempts.
daemon.log	Contains information logged by the various background daemons that run on the system.
debug	Contains errors and debug information.
dmesg	Contains kernel ring buffer information. When the system boots up, the screen displays information about the hardware devices that the kernel detects during the boot process. These messages are available in the kernel ring buffer, and whenever a new message comes, the old message gets overwritten.
dpkg.log	Contains information that is logged when a package is installed or removed using dpkg command.
faillog	Contains user failed login attempts.
kern.log	Contains information logged by the kernel and recent login information for all users.
lastlog	Contains information on the last login of each user.
messages	Contains messages generated by Nyquist.
php5-fpm.log	Contains errors generated by the PHP script.
syslog	Contains list of errors that occur when the server is running and server start and stop records
user.log	Contains information about all user level logs.

Table 6, Logs (Continued)

Log	Description
wtmp	Contains historical record of users logins at which terminals, logouts, system events, and current status of the system, and system boot time.
wvdialconf.log	Contains basic information about the modem port, speed, init string, and Internet Service Provider (ISP).

6 Setting DSP Parameters

When you select **DSP** from the appliance's web UI, the DSP page appears.

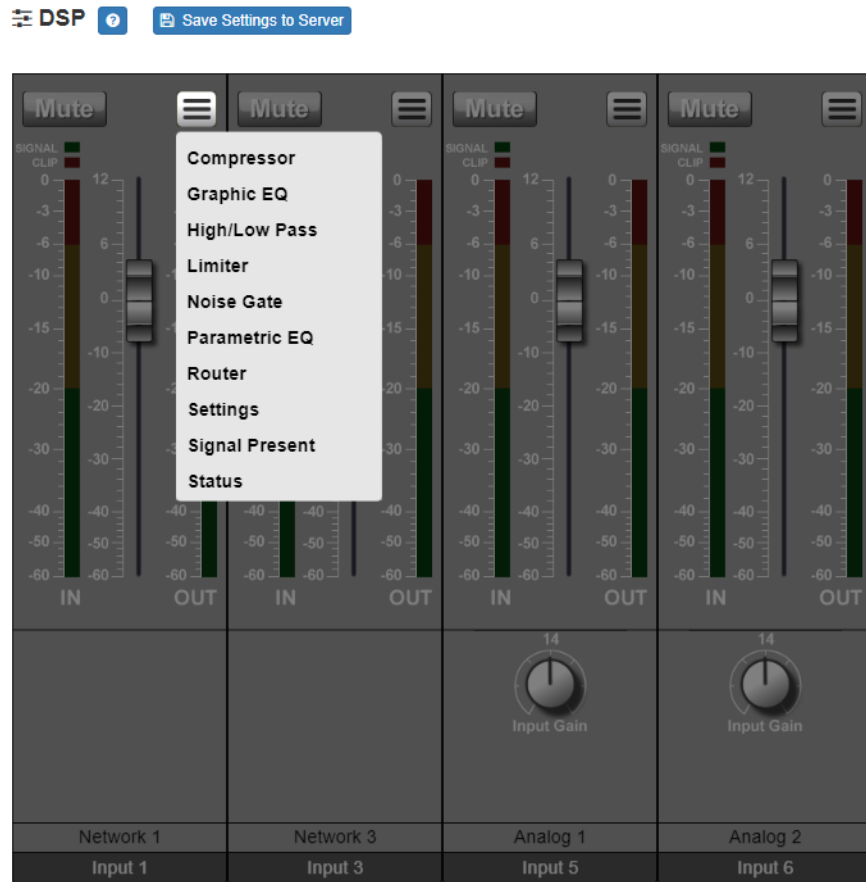


Figure 7, DSP Page with Channel Drop-Down Menu

From this page, you can adjust settings in the DSP. The appliance uses traditional processors (for example, Compressor, Noise Gate, Graphic Equalizer) for audio signals in the digital domain.

Note that depending on how your appliance channels are configured, you could see two, three, or four Network channels. For instance, you could be operating Network channels 1 and 2 in single channel bridged mode. You would then see Network 1, Network 3, and Network 4 on the DSP page. If you were to also place Network channels 3 and 4 in single channel bridge mode, you would see Network 1 and Network 3. If the appliance is configured in 4-channel mono mode, four Network channels appear on the DSP page.

The DSP page shows **Mute** and **Level** selections for the input channels and allows you to do the following:

- View **Signal** and **Clip** LEDs for each channel.
- Set the channel level for the four analog input, one network input, and one analog output channels.

Selecting the **Menu** button for a channel number displays a menu of other parameters. Some of these parameters affect all channels, in which case a channel number does not appear on the top of the graphic. If a parameter affects only the selected channel, a channel number appears on the selected parameter graphic.

DSP parameters and the **Mute** and **Level** buttons are described in the following table.

Table 7, DSP Page

Mute	Silences the audio for the selected channel.
Level	Adjusts the channel volume level in 1 dB increments.
Compressor	Lessens the dynamic range between the loudest and quietest parts of an audio signal.
Graphic EQ	Uses fixed frequencies to tailor the frequency content of an audio signal.
High/Low Pass	Sets the band of frequencies that will pass through the high pass and low pass filters and select the type of filter that is used.
Limiter	Prevents a signal from exceeding an adjustable maximum level.

Table 7, DSP Page (Continued)

Noise Gate	Eliminates low-level hiss, noise, or leakage, particularly when there is a high level of ambient noise.
Parametric EQ	Uses a center/primary frequency to allow tailoring of the frequency content of an audio signal.
Router	Routes audio to different devices.
Settings	Allows you to provide names and colors for the input and output channels.
Signal Present	Illuminates green when audio is present in the channel input.
Status	Provides real-time status of which mode (2-channel or single channel bridge mode) the power amplifier is configured.

6.1 Setting the Channel Level

The Channel Level control is a vertical slider that is adjusted in 1 dB increments and that controls the input or output levels to and from the mixer. The Channel Levels can range from -60 dB to 12 dB. If you place the mouse over the slider, the numerical value of the level appears.

6.2 Signal LED, Clip LED, and VU Meter

To the right of the Channel Level control are the Signal and Clip LEDs and the VU meter.

The green **Signal** LED automatically illuminates when a signal is being received. The red **Clip** LED automatically illuminates when the signal is clipping, or attempting to deliver an output voltage or current beyond its maximum capability. Clipping will distort the sound and can damage a speaker.

The VU meter not only illuminates green, yellow, or red (depending on the signal level) but also has a scale ranging from -60 to 0 to help you indicate the actual signal level.

6.3 Muting a Channel

You can mute a channel to cut off an audio signal and stop the production of sound.

To mute a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Mute** button for the channel that you want to silence.

The **Mute** button will illuminate red. You can select the **Mute** button again to unmute the channel.

6.4 Adjusting Volume Levels

Adjusts the channel volume level in 1 dB increments. The level can be set at a maximum of +12 dB to a minimum of -60 dB.

To adjust the channel volume level:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Use the slider for the channel's **Level** row to adjust the level.

6.5 Adjusting Compression Settings

A compressor slightly reduces the dynamic range of a signal. This effect is perceived to quiet loud sounds and boost quiet sounds. A compressor smooths transients. Compressor parameters are set per channel. The Compressor dialog box has LEDs for the input and output signals.

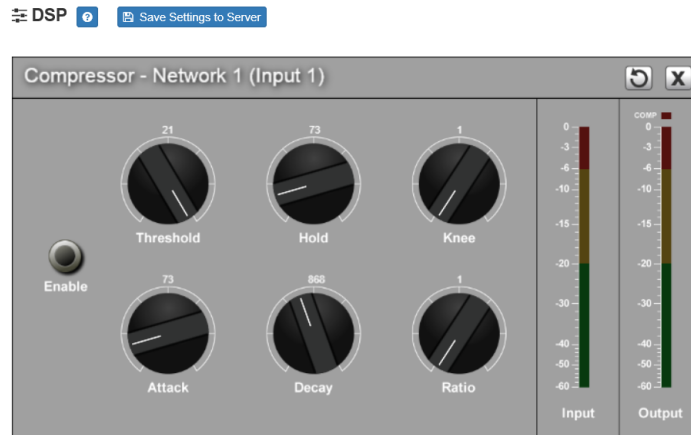


Figure 8, Compressor Settings

To adjust the compressor settings for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **Compressor**.
- Step 4 Make desired adjustments using the controls described in "Compressor Settings" on page 17.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

- Step 5 Select **Enable** to apply the settings to the selected channel.

Table 8, Compressor Settings

Threshold	Sets the threshold level, which is the point where the signal activates the compressor circuit. The range is -135 to +21 dB.
Attack	Sets how fast the compressor turns on when the audio signal passes the threshold level. The range is 1 to 500 ms.
Hold	Sets how long the compressor is on after the signal has fallen below the threshold. The range is 1 to 500 ms.

Table 8, Compressor Settings

Decay	Sets the rate of turn off of the compressor after the signal is below the threshold.he range is 0 to 2000 ms.
Knee	Sets how the compressor reacts to signals once the threshold is reached. Increasing the knee level decreases the obvious transition from the uncompressed to the compressed sound. The range is 1 to 100.
Ratio	Sets the compression ratio. For example, if the ration is set for 6 (6:1), the input signal must cross the threshold by 6 dB for the output level to increase by 1 dB. The range is 1 to 100.

6.6 Adjusting the Graphic Equalizer

The graphic equalizer allows you to use fixed frequencies to tailor the frequency content of an audio signal. This allows you to tailor the audio signal frequency content to optimize the frequency response of the sound system.

The graphic equalizer parameters are set per channel.

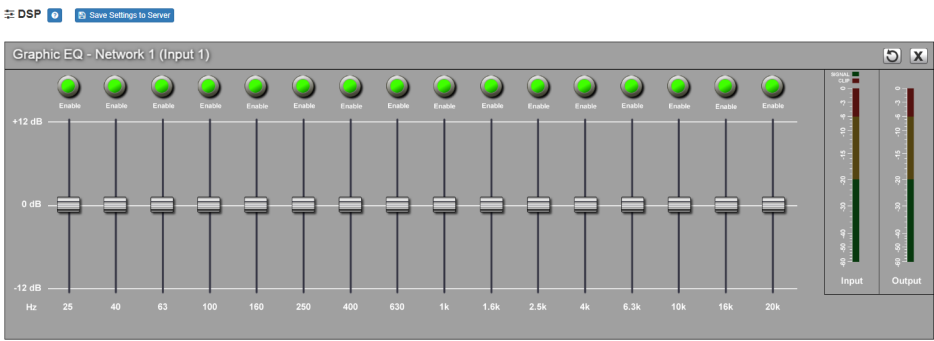


Figure 9, Graphic EQ Settings

To adjust the graphic equalizer settings for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **Graphic EQ**.

The Graphic EQ provides 16 slider knobs that can be moved between +12 dB and -12 dB. The frequency of each slider is different and range from 25 Hz to 20,000 (20k) Hz. By default, each knob is set at 0 dB, which means that no frequencies are being boosted or cut.

Note: For the best results, frequencies should be cut only. Boosting frequencies to compensate for room dimensions or speaker response deficiencies usually results in a loss of headroom in the signal chain.

- Step 4 Adjust frequencies as desired, ensuring the **Enable** LEDs are green for the selected frequencies.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

6.7 Setting High/Low Pass Parameters

You can set the band of frequencies that will pass through the high pass and low pass filters and select the type of filter that is used through the channel's **High/Low Pass** drop-down menu option.



Figure 10, High/Low Pass Parameters

To adjust the high/low pass parameters for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **High/Low Pass**.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

- Step 4 Set the parameters described in the following table:

Table 9, High Pass/Low Pass Parameters

High Pass (Low Cut)

This feature helps eliminate low frequency noise (signals of 100 Hz and below, such as background rumble from ventilation systems, etc.) and is used primarily with microphone level input. It is particularly effective when hand held microphones are used.

Frequency

Set the cutoff frequency. You can adjust the frequencies by moving the knob or by double-clicking the knob and typing the frequency. When typing the frequency, only numeric values from 20 Hz to 20,000 Hz can be entered.

The high pass filter attenuates content below this frequency and lets frequencies above this cutoff frequency to pass through the filter.

Type

Available filter types are:

- Linkwitz-Riley (12, 24, and 36 dB per Octave)
- Butterworth (12, 18, and 24 dB per Octave)
- Bessel (12, 18, and 24 dB per Octave)

The filter type name and the selected dB appear above the knob.

Table 9, High Pass/Low Pass Parameters (Continued)

Low Pass (High Cut)

This feature helps eliminate high frequency noise (signals of 8000 Hz and above) such as background hiss and sibilance (excessive "S" in vocals, etc.) and is used primarily with microphone level input. It is particularly effective when hand held microphones are used.

Frequency Set the cutoff frequency. You can adjust the frequencies by moving the knob or by double-clicking the knob and typing the frequency. When typing the frequency, only numeric values from 20 to 20,000 can be entered.

The low pass filter attenuates content above this frequency and lets frequencies below this cutoff level to pass through the filter.

Type Available filter types are:

- Linkwitz-Riley (12, 24, and 36 dB per Octave)
- Butterworth (12, 18, and 24 dB per Octave)
- Bessel (12, 18, and 24 dB per Octave)

The dB per Octave refers to how steep the roll off of the filter is after the selected cutoff frequency.

The filter type name and the selected dB appear above the knob.

Band pass filters consist of a High Pass/Low Cut and a Low Pass/High Cut filter. This arrangement can be useful for tailoring the frequency response of a microphone exclusively for vocals, sometimes useful in a very noisy environment to filter out the higher and lower frequencies that could mask the human vocal range during announcements.

6.8 Adjusting the Limiter

A limiter is a compressor with a high slope that is used to prevent a signal exceeding a set decibel level. Limiters are used as safeguards against signal clipping. Limiter parameters are set per channel.



Figure 11, Limiter Settings

To adjust the limiter settings for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel or select the **Menu** button for the **Output**.
- Step 3 From the drop-down menu, select **Limiter**.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

- Step 4 Adjust the following settings as needed:

Table 10, Limiter Settings

Threshold	Sets the signal level at which the limiter is enabled. The range is -24 to +24 dB.
------------------	--

Table 10, Limiter Settings (Continued)

Decay	Sets the rate for turn off of the limiter after the signal is below the threshold. Decay range is 5 to 2300 milliseconds.
RMSTC	Sets how fast the limiter reacts to the above threshold signal. RMSTC range is 50 to 10000.

6.9 Adjusting Noise Gate Settings

A noise gate controls the volume of an audio signal by attenuating by a fixed amount the signals that register below the threshold.



Figure 12, Noise Gate Settings

To adjust the noise gate settings for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **Noise Gate**.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

Step 4 Adjust the following settings as needed:

Table 11, Noise Gate Settings

Threshold	Sets the threshold level that the signal must be below for the noise gate to “close” (prevent the sound from getting through). Threshold range is -135 to +21 db.
Attack	Adjusts how long it takes for the gate to open once the signal falls below the threshold. Attack range is 1 to 500 ms.
Hold	Defines the length of time the gate will stay fully open after the signal falls below the threshold. Hold range is 1 to 500 ms.
Decay	Sets the rate for turn off of the gate after the signal is below the threshold. Decay range is 0 to 2000 ms.

6.10 Adjusting Parametric Equalizer Settings

A parametric equalizer is a multi-band variable equalizer that allows control of frequency amplitude (boost/cut), center frequency, and frequency bandwidth, or Q.

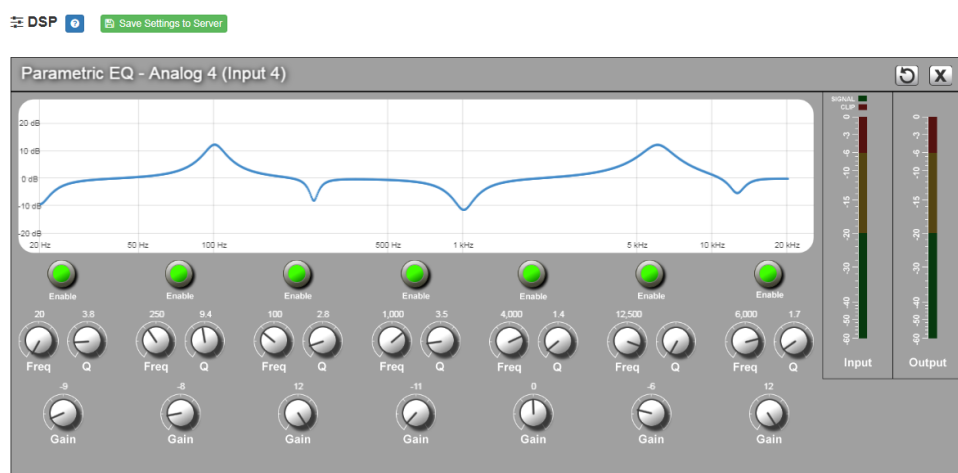


Figure 13, Parametric Equalizer Settings

The parameter equalizer settings for your device allows you to adjust the Q and gain for seven separate frequencies, which then become plot points on the screen's graph.

To adjust the parametric equalizer settings for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **Parametric EQ**.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

- Step 4 Adjust frequencies as desired, ensuring the **Enable** LEDs are green for each selected frequency. You can adjust the frequencies by moving the **Freq** knob or by double-clicking the knob and typing the frequency. When typing the frequency, only numeric values from 20 to 20,000 can be entered.

- Step 5 Make desired **Q** adjustments by adjusting knob (or double-clicking and typing the desired adjustment. Q can be from 0.1 to 20 and sets how wide to either side of the selected frequency the adjacent frequencies are affected.

Q is the Quality or Quality Factor which refers to the bandwidth of one band of a parametric equalizer. Q is calculated by dividing the center frequency in Hz by the width of the boost or cut zone +3 dB or -3 dB above or below 0 dB.

- Step 6 For each frequency, use the **Gain** knob or double-click the knob and type the gain to either boost (turn up_ or cut (turn down).

Gain knobs can be moved between +12 or -12 dB. By default, each knob is set at 0 dB, which means that no frequencies are being boosted or cut.

- Step 7 Select **Save Settings to Server**.

6.11 Adjusting Router Settings

Router settings allow you to specify where to output a signal. For example, you could have four speakers attached to the power amplifier that is operating in 4-channel mono mode and only want to route the signal to the first speaker.

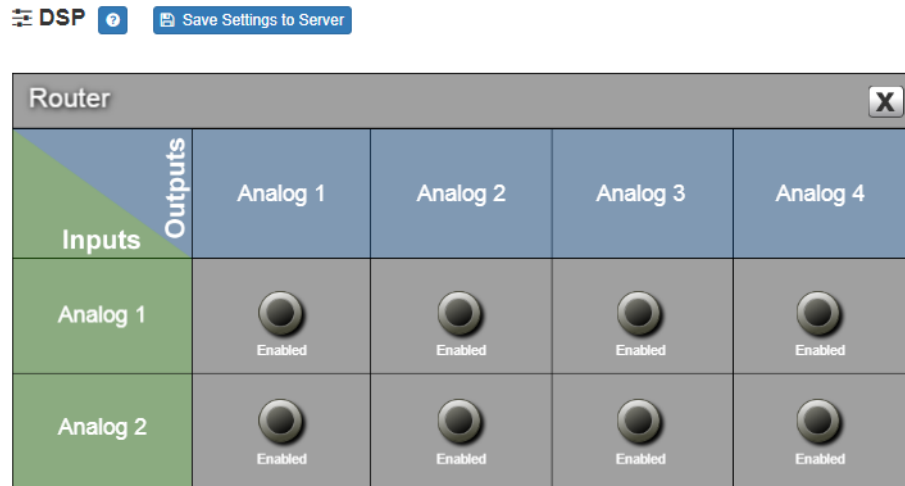


Figure 14, Router

The number of output channels that appear on the Router screen depend on if channels are configured in Single Channel Bridged or Mono Channel. For example, if Channels 1 and 2 are in Single Channel Bridged Mode, then three output channels appear. If Channels 3 and 4 were to also be placed in Single Channel Bridged Mode, then only two output channels appear on the Router screen.

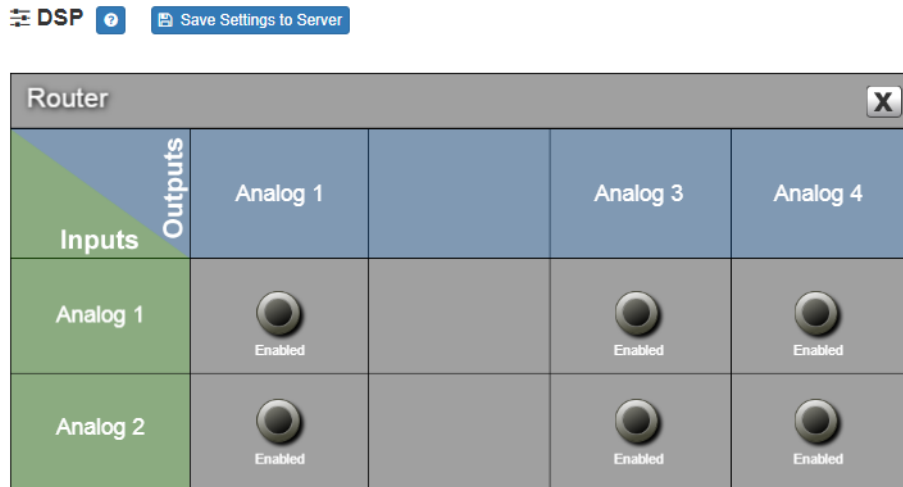


Figure 15, Router for Single Channel Bridged Mode and 2 Mono Mode Channels

To adjust the router settings:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **Router**.
- Step 4 Use the **Enable** button to select the output.

6.12 Settings

You can set select names and colors for each of the input channels. Note that the number of Network channels that appear can range from 2 to 4, depending on if channels are configured in mono or single channel bridge mode.

Settings  

	Name	Color
Input 1:	Network 1	Green ▾
Input 2:	Network 2	Orange ▾
Input 3:	Network 3	Green ▾
Input 4:	Network 4	Orange ▾
Input 5:	Analog 1	Purple ▾
Input 6:	Analog 2	Red ▾

Save

Figure 16, Settings Parameters for 2 Channel Mono

For example, if Network 1 and 2 and Network 3 and 4 channels have been placed in Single Channel Bridged Mode, then only two Network channels appear.

Settings  

	Name	Color
Input 1:	Network 1	Green ▾
Input 3:	Network 3	Green ▾
Input 5:	Analog 1	Purple ▾
Input 6:	Analog 2	Red ▾

Save

Figure 17, Settings Parameters for 2 Single Channel Bridged

To adjust the settings for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **Settings**.
- Step 4 For each channel, type the name that you want to display for the channel.
- Step 5 For each channel, select a color that will be used to highlight the channel.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

- Step 6 Select **Save**.

6.13 Signal Present

You can set parameters for when a channel accepts a signal. You can set specific parameters for each input channel and for the output channel.

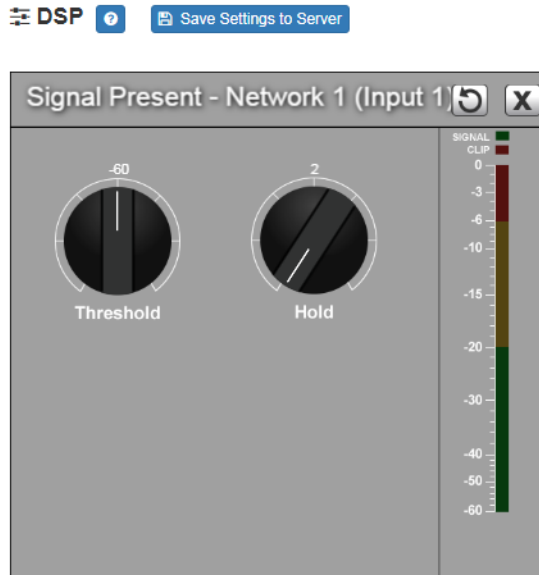


Figure 18, Signal Present Parameters

To adjust the Signal Present settings for a channel:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.
- Step 3 From the drop-down menu, select **Signal Present**.

Note: If you want to return to the factory settings, select the **Reset** icon that appears in the right corner.

- Step 4 Adjust the following settings as needed.

Table 12, Signal Present Parameters

Threshold	Sets the threshold level, or at what level the Signal LED is illuminated.
Hold	Sets the number of milliseconds that the signal light stays on after the signal is no longer present.

6.14 Status

The Status selection for the power amplifier provides real-time status of whether the amplifier switch positions are set for 2-channel mono or single channel bridged mode. This dialog box also provides LEDs for thermal protection and clipping and a real-time reading of the appliance's temperature. Note that the number of Network input channels that appears depends on if the switches are set for 2 Channel Mono or Single Channel Bridged mode.

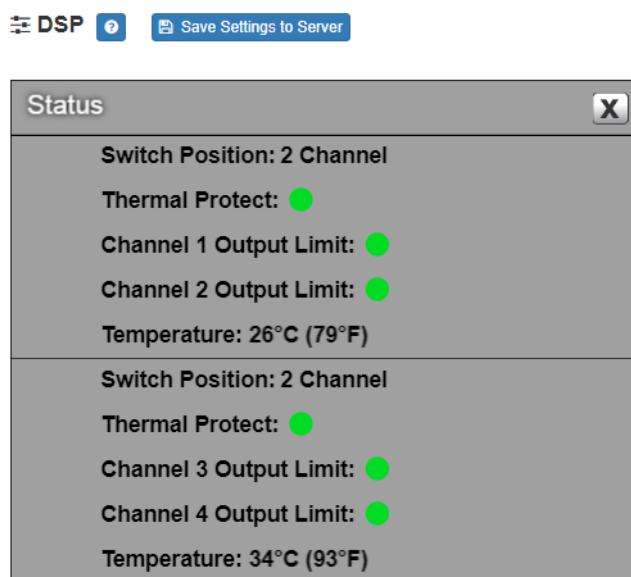


Figure 19, Status for 2 Channel

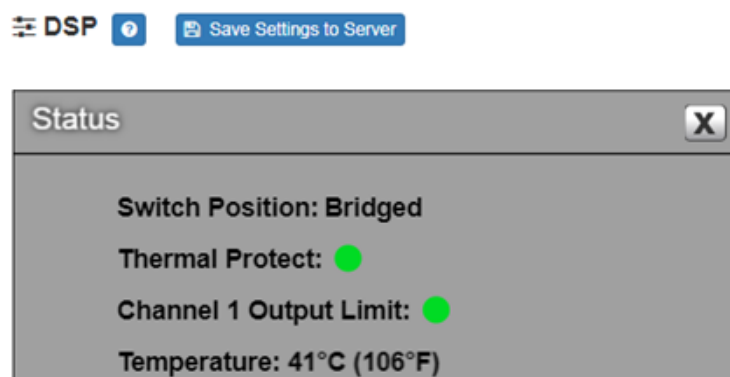


Figure 20, Status When Channels 1 and 2 Are Bridged

To view status for the power amplifier:

- Step 1 On the appliance Web UI's main page, select **DSP**.
- Step 2 Select the **Menu** button for the channel.

From the drop-down menu, select **Status**.

The view only information that appears is described in the following table:

Table 13, Status

Switch Position	Indicates the position of the Amplifier Mode switch located on the rear of the appliance. Bridged mode is typically used when higher power, single channel operation with a high impedance loudspeaker load is needed. For information about setting the Amplifier Mode, refer to the installation manual for the appliance.
Thermal Protect	Appears red if the equipment has become too hot and has placed itself into protection mode. Otherwise, the LED is green.
Channel 1 Output Limit	Appears red if the output signal is being clipped or distorted. Otherwise, the LED is green.
Channel 2 Output Limit	Appears red if the output signal is being clipped or distorted. Otherwise, the LED is green.
Temperature	Provides the real-time temperature of the appliance in both Celsius and Fahrenheit.

